

VDO WALL CONTROLLER

Video Wall Controller, 2x2



OVERVIEW

This 1080P 2X2 video wall controller, support HDMI or DVI input and 4 HDMI output, the main function is to divide a complete HDMI, DVI HD image signal into 4 blocks and assign to 4 video display units (such as rear projection unit, LCD TV, etc.).

Complete with 4 HDMI HD video display units to form a large dynamic image wall.



FEATURE

- Support HDMI and DVI input;
- Support 4 HDMI output;
- Output support RGB 4:4:4;
- Support input resolution 1080P/1080i/720P/576P/576i/480P;
- Support output resolution 1080P/1080i/720P/576P/576i/480P;
- Support RS232 control;
- Support 2X2/1X2/2X1 splicing, easy operation, plug and play;
- Support 2X2 automatic splicing function;

APPLICATIONS



Outdoor video wall



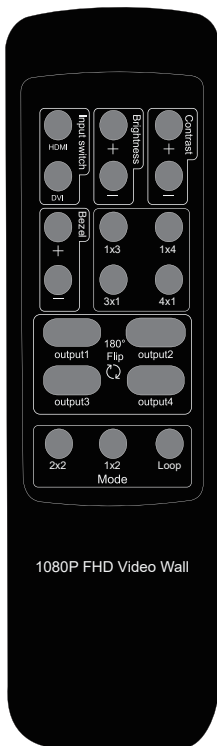
Shopping mall video wall





Monitor room


SPECIFICATIONS


HDMI resolution	the highest support 1920x1080/60Hz
Support audio format	stereo
Input cable length	≤5m AWG26 HDMI standard cable
Output cable length	≤5M,AWG26 HDMI standard cable
Max working current	300mA
Power adapter specifications	input AC (50HZ, 60HZ) 100V-240V Output 12V DC/1A
Operating Temperature range	(-10°C~ +45°C)
Dimension (L x W x H)	121x119x19(mm)
Weigh	228g





 : Input switching selection



 : Brightness adjustment


 : Contrast adjustment


 : Bezel adjustment


 : Mode selection
 1x3 mode/1x4 mode
 3x1 mode/4x1 mode


 : Output 180°Flip


 : Mode selection
 2x2 mode/1x2 mode/Loop switching mode

ORDER INFOMATION

PRODUCT	PART NUMBER
Video Wall Controller, 2x2	MD-HDWW-0202