

MEDIA CONVERTER

Media Converter 10/100/1000 Mbps with LFP Management



FEATURE


- Complies with IEEE 802.3, IEEE 802.3u, IEEE802.3z, IEEE802.3ab, IEEE 802.3x autonegotiation
- Extends distances ranging from 0.5km (multi-mode fiber) to 120km (single mode fiber)
- Wall-Mountable
- Auto-negotiation of duplex(HDX/FDX) on RJ-45 port
- Auto MDI/MDI-X support on RJ-45 port
- Rate Limit function, 64Kbps
- Supporting Loopback, precisely locating the failure, convenient for link test
- Supporting LFP, quickly locates the failure
- Supporting remote power off alarming
- Economical management function within bandwidth
- Supporting Remote management
- Easy installation with complete LED indicators for working situation
- With powerful network management function, supporting WEB and SNMP



OVERVIEW

The Focomm Series is designed to make conversion between 1000Base-FX to 10/100/1000Base-TX Gigabit Ethernet. With SNMP agent and web-based management, the network administrator can logon the converter to monitor, configure and control the activity of each port. In addition, the converter implements bandwidth rating management capability via the intelligent software. The overall network management is enhanced, and the network efficiency is also improved to accommodate and deliver high bandwidth applications. The converter is completely transparent when connected so the network performs exactly the way it did before - only now, it allows the co-existence of both copper and fiber mediums. Added flexibility is available with ST, SC, FC and WDM Simplex SC connectors. Extra distances are possible with the single mode version delivering up to 120km connectivity per transmitted segment.

APPLICATION

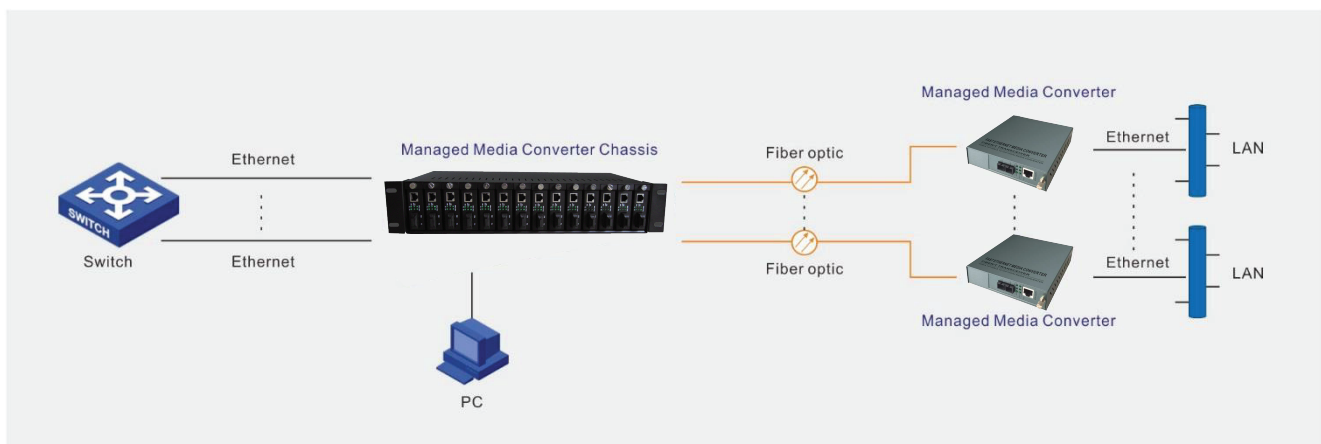

SPECIFICATION

Interface

- 1 x Ethernet port (RJ45) 10/100/1000Base-Tx
- 1 x Optical port (1x9) 1000Base-Fx

Optical Port

- Available for 1310nm and 1550nm Single mode, and 1310nm Multi mode;
- Transfer Distance: up to 120km;
- Connectors: SC/PC, ST/PC, FC/PC optional
- Fiber core: 8.3um, 8.7um, 9um and 10um on single mode fiber, 50, 62.5 and 100um on multi-mode fiber

Ethernet Port

- Available speed: force 10Mbps, force 100Mbps, force 1000Mbps and auto-detective 10/100/1000Mbps Full-Duplex and Half-Duplex auto-negotiation
- Connectors: RJ-45 Connector; MDI/MDI-X connection autosensing

Standard

- IEEE802.3 (10Base-T)
- IEEE802.3u (100Base-TX/FX)
- IEEE 802.3ab (1000Base-T)
- IEEE 802.3z (1000Base-SX/LX/CX/T)
- IEEE802.3x (Flow control)
- SNMP v1/v2c (Simple Network Management Protocol)

LED Indicators

- Power Status, Speed Status, FX Link/Act, TX Link/Act

Power Requirement

- Input: 220V AC Internal Power Adapter

Physical Characteristics

- Housing: Metal enclosure
- Dimensions: 156 x 128 x 32mm (excluding the connector and power switch)
- Weight: 0.75kg

Environmental Limits

- Operating Temperature: 0°C to 50°C
- Storage Temperature: -20°C to 70°C
- Operating Humidity: 10% to 90% RH (non-condensing)
- Storage Humidity: 5% to 90% RH (non-condensing)

Agency Approvals

- FCC Part 15 of Class A & CE approved, RoHS Compliant.

Warranty

- 3 years

ORDER INFORMATION

PRODUCT	PART NUMBER
Media Converter, Management, Dip Switch, 10/100,10000 Tx SC, SM, 20Km	MC-MG9-LFP-20
Media Converter, Management, Dip Switch, 10/100/1000 Tx SC, SM, 40Km	MC-MG9-LFP-40
Media Converter, Management, Dip Switch, 10/100/1000 Tx, SC, SM, 80Km	MC-MG9-LFP-80